


**WAGO WALL-NUTS™**



## Pushwire Connectors

*for Solid and Stranded Copper Wire*

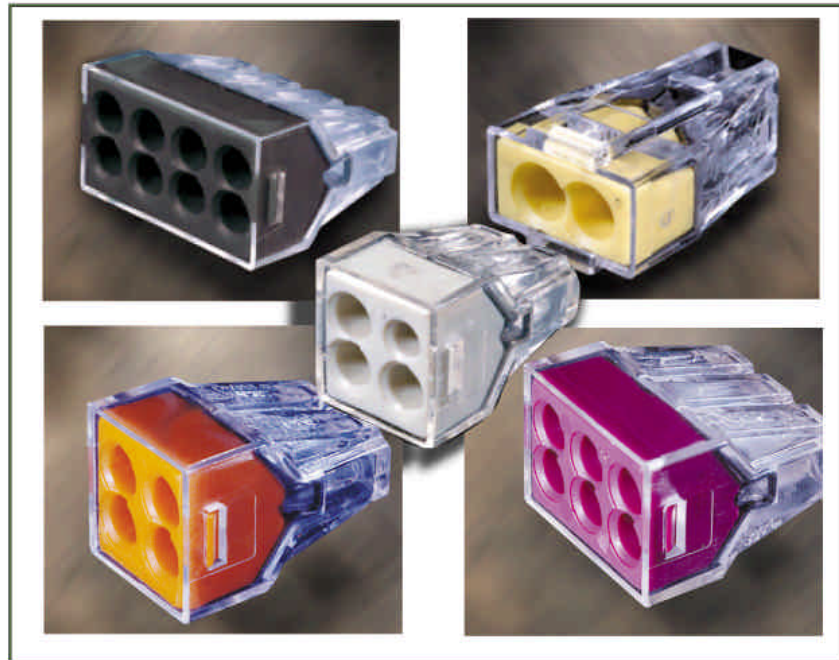

*No twist, push wire  
connectors for electrical  
junction boxes*



# Introducing **WAGO** WALL-NUTS™

**WAGO** WALL-NUTS™ are the first push-in connectors that connect both stranded and solid copper wires. Now you can use the speed and dependability of push-wire technology in every application.



## See The Safety

**WAGO** WALL-NUTS™ clear housing means you can see the firm connection of solid or stranded conductors. No more guessing whether the wires are twisted together or are pushed in far enough. Visual inspection allows you to see that **WAGO** WALL-NUTS™ make reliable connections.

## Fast, Easy Installation

The new **WAGO** WALL-NUTS™ push-in connectors makes the job of wire connecting easier. No more twisting and taping required. Simply strip the wire; insert the conductor and you're finished. The integrated test port allows for continuity testing without re-insertion.



Toll Free: 1-800-DIN RAIL (346-7245)

## Safe

**WAGO WALL-NUTS™** hold each wire individually, eliminating loose connections. **WAGO WALL-NUTS™** are touch-proof and rated to 105° C. **WAGO WALL-NUTS™** are UL Listed/CSA certified for 600 volts (1000 volts for fixtures and signs) and current rated to the largest conductor used.



**WAGO WALL-NUTS™** are perfect for new construction and retrofit work.



**WAGO WALL-NUTS™** work with solid and stranded wire making main, branch and fixture hookup fast, easy and safe.

## Save Time

**WAGO WALL-NUTS™** provide up to 50% time savings on installation. Secure connections reduce expensive trouble shooting and warranty work.



**WAGO WALL-NUTS™** The 773-124's special opening wire range 18 stranded or solid; 18-22 tinned stranded copper.

## 18 AWG Stranded Range

The **773-124** has a special opening that accepts 18 AWG stranded copper wire. This makes the connection of incandescent light fixtures, dimmer switches, ceiling fans and other accessories to branch and main circuits a breeze.

Toll Free: 1-800-DIN RAIL (346-7245)

# WAGO WALL-NUTS™

Connect Stranded  
and Solid Wire

600 V building wiring  
1000 V fixtures and signs  
Current rating: Largest conductor used  
105° C rated (221° F)

Fast - Safe - Easy



File: E69654

Clear housing allows visual confirmation of connection  
Test port for easy continuity testing



File: LR46759


	<p>Yellow 2-conductor, 100 pc/box For 2500 piece bag, order: <b>773-102/VE00-2500</b> - 12-16 AWG Stranded Copper (stranding pattern less than or equal to 19) - 12-18 AWG Solid Copper</p>		<p>Ground 2-conductor, 100 pc/box: - 12-16 AWG Stranded Copper (stranding pattern less than or equal to 19) - 12-18 AWG Solid Copper</p>
	<p>Orange 4-conductor, 100 pc/box For 2500 piece bag, order: <b>773-104/VE00-2500</b> - 12-16 AWG Stranded Copper (stranding pattern less than or equal to 19) - 12-18 AWG Solid Copper</p>		<p>Ground 4-conductor, 100 pc/box: - 12-16 AWG Stranded Copper (stranding pattern less than or equal to 19) - 12-18 AWG Solid Copper</p>
	<p>Lt. Gry Special 4-cond. 100pc/box For 2500 piece bag, order: <b>773-1X4/VE00-2500</b> - 12-16 AWG Stranded Copper (stranding pattern less than or equal to 19) - 12-18 AWG Solid Copper</p>	<p>(Special opening) - 18 AWG Stranded Copper (Stranding pattern less than or equal to 16) - 18 AWG Solid Copper</p>	
	<p>Purple 6-conductor, 50pc/box For 2500 piece bag, order: <b>773-106/VE00-2500</b> - 12-16 AWG Stranded Copper (stranding pattern less than or equal to 19) - 12-18 AWG Solid Copper</p>		<p>Ground 6-conductor, 50 pc/box: - 12-16 AWG Stranded Copper (stranding pattern less than or equal to 19) - 12-18 AWG Solid Copper</p>
	<p>Dark Grey 8-conductor, 50pc/box For 2500 piece bag, order: <b>773-108/VE00-2500</b> - 12-16 AWG Stranded Copper (stranding pattern less than or equal to 19) - 12-18 AWG Solid Copper</p>		<p>Ground 8-conductor, 50 pc/box: - 12-16 AWG Stranded Copper (stranding pattern less than or equal to 19) - 12-18 AWG Solid Copper</p>

WAGO Corporation N120 W19129 Freistadt Rd., PO. Box 1015, Germantown, WI 53022

Tel.: 262 / 255-6222 Fax: 262 / 255-3232 Toll Free: 1-800-DIN RAIL (346-7245)

www.wago.com Info.us@wago.com



# 222 Series 3 or 5 Conductor Compact Connector

Cross section: 28 – 12 AWG  
(stranded and solid)  
Electrical specs: 600 V maximum  
20 A maximum  
Strip length:  9 - 10 mm / 0.37 in  
Maximum operating temperature: 105° C

For all connections requiring...

- Stranded / solid wires
- Wide range of wire sizes
- Combination of different wire sizes and types
- Small space consumption
- Built-in test point
- Protection against electrical shock, touch safe
- Low installed cost and safe operation
- Maintenance-free connection



	Item No.	Pack.-unit pcs	Item No.	Pack.-unit pcs
	 <b>222-413</b>	500 (10 x 50)	 <b>222-415</b>	400 (10 x 40)
<b>Technical Data</b>				
Number of connection points per connector	3		5	
Potentials per connector	1		1	
Connection type	CAGE CLAMP® Spring pressure connection technology		CAGE CLAMP® Spring pressure connection technology	
Height	14.5 mm / 0.571 in		14.5 mm / 0.571 in	
Width	17 mm / 0.669 in		26.6 mm / 1.047 in	
Depth	20.5 mm / 0.807 in		20.5 mm / 0.807 in	
Color	Gray (w/orange levers)		Gray (w/orange levers)	
<b>Accessories</b>				
Wire cutting and stripping tool (22-10 AWG)	<b>Item No.</b> <b>206-130</b>	<b>Pack.-unit pcs</b> 500 (10 x 50)		

## Easy as 1, 2, 3...




1) Strip wire



2) Push up lever



3) Insert conductor and push down lever

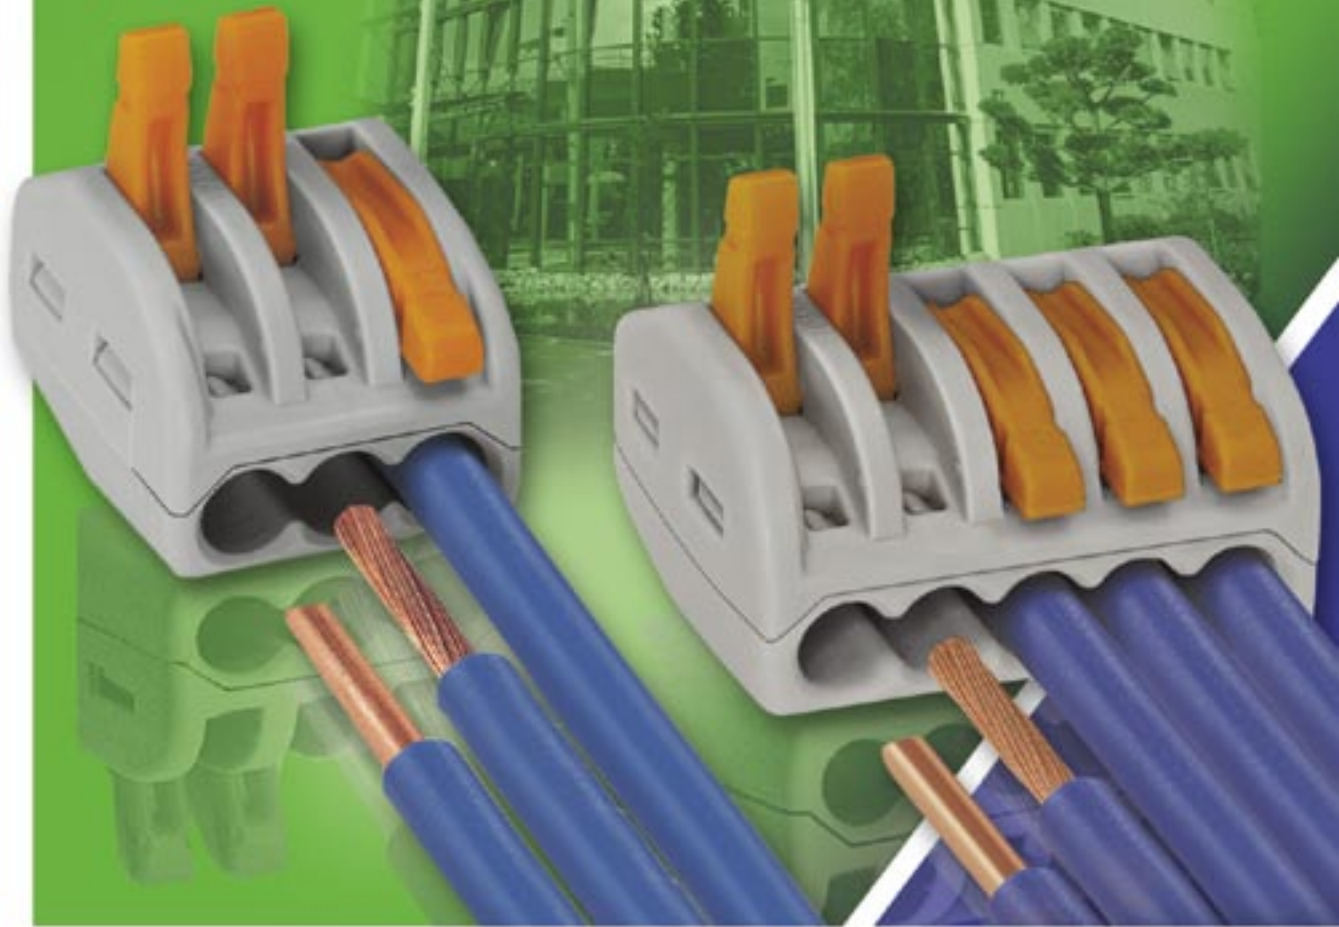

# LEVER-NUTS™

• 222 Series: 3 or 5 Conductor Compact Connectors